



FRONT VIEW

PADLOCKABLE  
HANDLE  
WITH 2-PT. LATCH

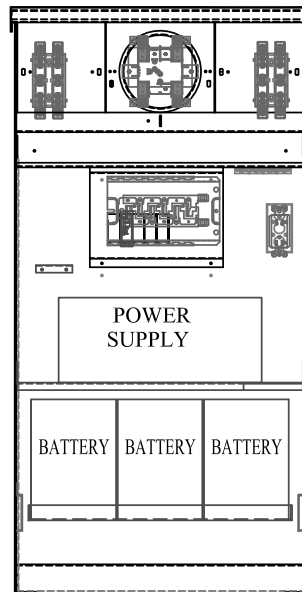

FRONT VIEW


SHOWN LESS CUSTOMER DOOR

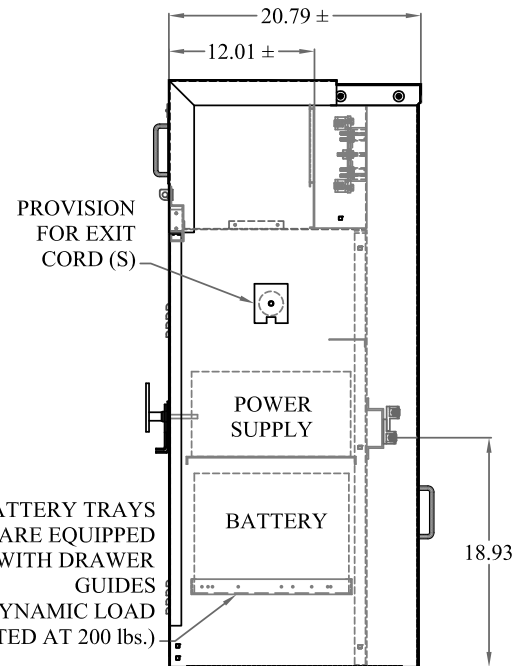

SIDE VIEW

PROVISION  
FOR EXIT  
CORD (S)

BATTERY TRAYS  
ARE EQUIPPED  
WITH DRAWER  
GUIDES  
(DYNAMIC LOAD  
RATED AT 200 lbs.)

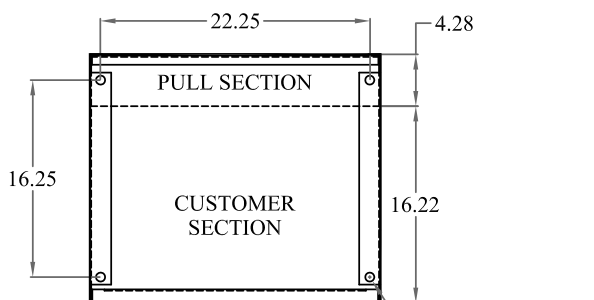

PLAN VIEW

Ø0.75 TYPICAL  
MNTG. HOLE

**SINGLE METER STAND-BY  
POWER SUPPLY PEDESTAL**

STANDARD FEATURES:

- METER SOCKET WITH TEST BLOCKS 4-JAW
- UTILITY LANDING LUGS 250kCMIL
- CIRCUIT BREAKER INTERIOR COPPER BUS
- ACCOMODATES 6-CIRCUIT INTERIOR MAXIMUM
- DUPLEX RECEPTACLE FOR POWER SUPPLY
- MAXIMUM OF THREE (3) BATTERIES

SPECIFICATIONS

- \* NEMA 3R CONSTRUCTION
- \* POLYESTER POWDER-COATED FINISH EXCEEDS ASTM B-117 SPECIFICATIONS
- \* FABRICATED FROM CORROSION-RESISTANT ZINC COATED STEEL
- \* ASA 61 GRAY OR OTHERWISE SPECIFIED

- \* ALL FACTORY WIRING 600 VOLT RATED COPPER
- \* ALL COMPONENTS UL LISTED
- \* ALL EXTERIOR DOORS AND COVERS PADLOCKABLE
- \* UTILITY COVERS SEALABLE