

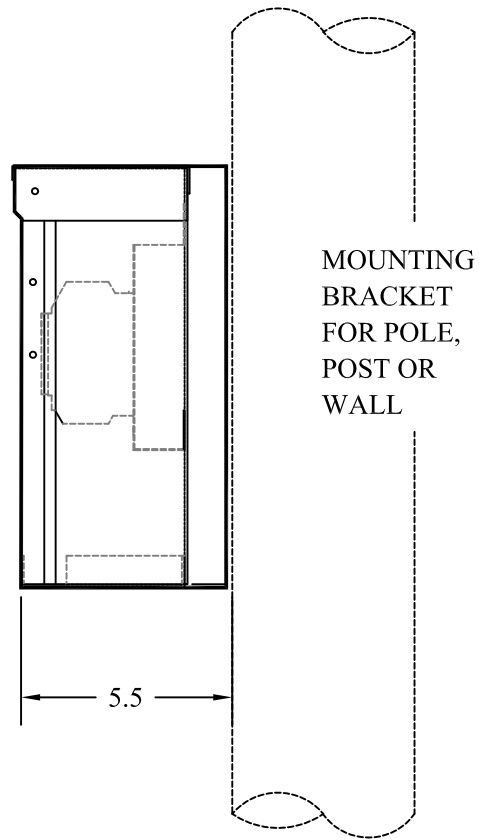


FRONT VIEW

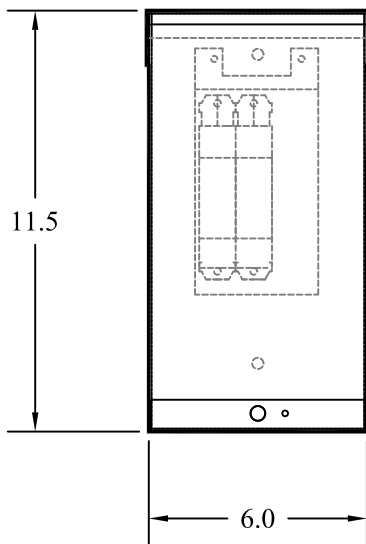

TYPICAL WIRING DIAGRAM

CAT. NO. SD-240V



SIGN DISCONNECT

TYPICAL APPLICATIONS INCLUDE
SIGN LIGHTING DISCONNECT

STANDARD FEATURES

CIRCUIT BREAKER
DEADFRONT

CAL TRANS TYPE SD

SPECIFICATIONS

- * NEMA 3R CONSTRUCTION
- * POLYESTER POWDER-COATED FINISH EXCEEDS ASTM B-117 SPECIFICATIONS
- * FABRICATED FROM CORROSION-RESISTANT ZINC COATED STEEL

- * ASA 61 GRAY COLOR
- * ALL FACTORY WIRING 600 VOLT RATED COPPER
- * ALL COMPONENTS UL LISTED
- * ALL EXTERIOR DOORS AND COVERS PADLOCKABLE