




USP2 MODEL SERIES

0 - 200 AMPERES 0 - 240 VOLTS

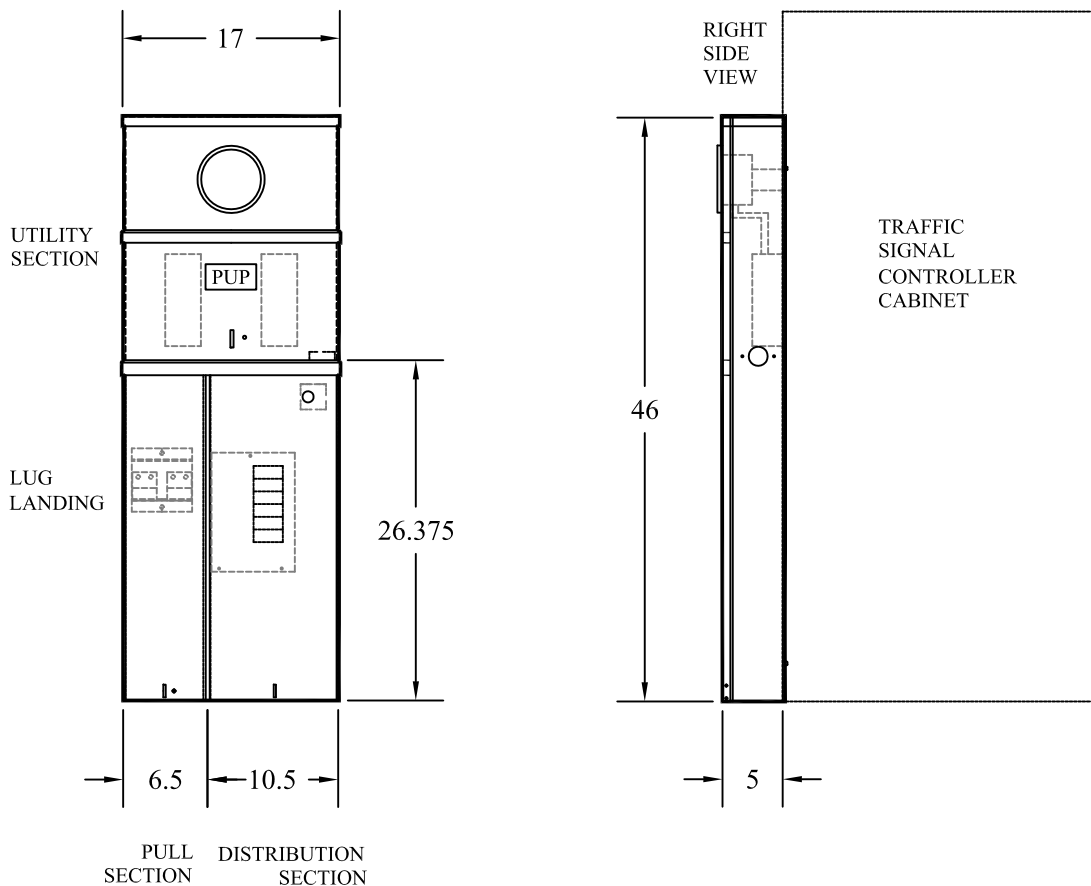

TYPICAL INSTALLATION - MOUNTS ON SIDE OF CONTROLLER

SINGLE METER SERVICE PEDESTAL

TYPICAL APPLICATIONS INCLUDE
HIGHWAY, STREET AND
SIGN LIGHTING AND
TRAFFIC SIGNAL CIRCUITS

CAL TRANS TYPE II-B

STANDARD FEATURES

- METER SOCKET WITH TEST BLOCKS 4 JAW
- UTILITY LANDING LUGS 250 KCMIL
- STANDARD VOLTAGE 120/240VAC 1 PHASE 3 WIRE
- CIRCUIT BREAKER INTERIOR COPPER BUS
- ALL METERED 6 CIRCUIT 125 AMP
- OR
- (2) 4 CIRCUIT 125 AMP, METERED AND UNMETERED
- PHOTOELECTRIC SOCKET PROVIDED WITH UNMETERED CIRCUITS
- EXPOSED WATT HOUR METER

SPECIFICATIONS

- * COMPLIES WITH EUSERC STANDARDS
- * ALL COMPONENTS UL LISTED
- NEMA 3R CONSTRUCTION
- * POLYESTER POWDER-COATED FINISH
- EXCEEDS ASTM B-117 SPECIFICATIONS
- * FABRICATED FROM CORROSION-RESISTANT
- ZINC COATED STEEL
- * AVAILABLE IN ALUMINUM
- * LIGHT GREEN COLOR NO. 14672 PER
- FEDERAL SPECIFICATIONS 595 -
- CUSTOM COLORS AVAILABLE
- * ALL FACTORY WIRING 600 VOLT RATED COPPER
- * ALL EXTERIOR DOORS AND COVERS PADLOCKABLE
- * UTILITY COVERS SEALABLE