



FRONT VIEW

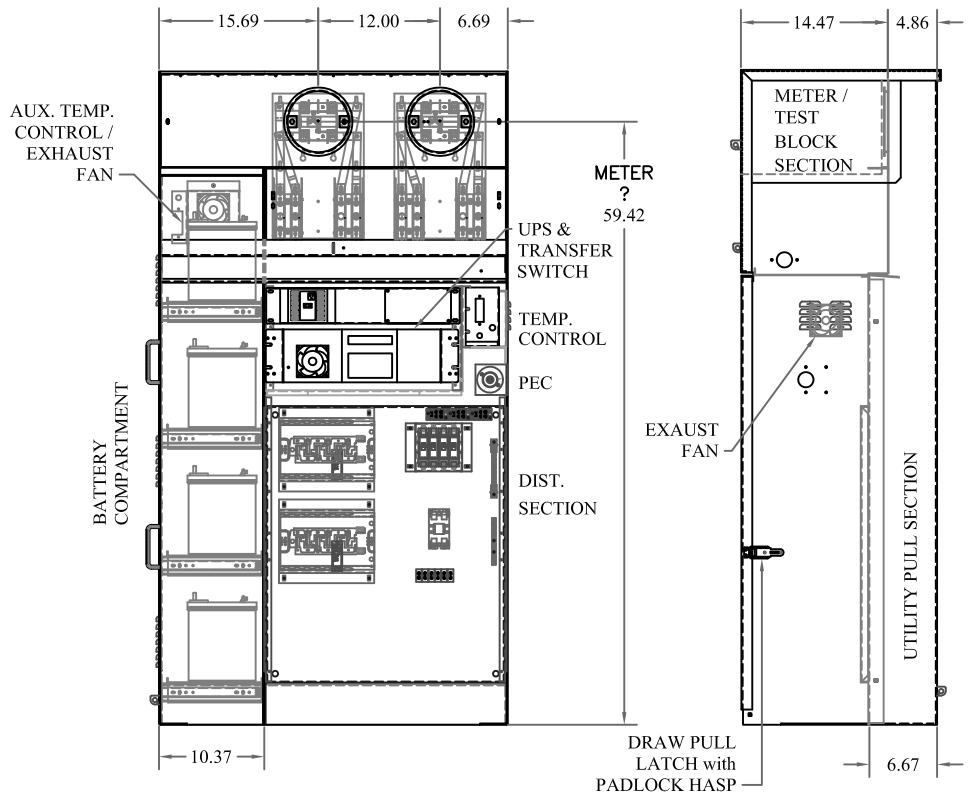

FRONT VIEW

SHOWN WITHOUT COVERS

SIDE VIEW

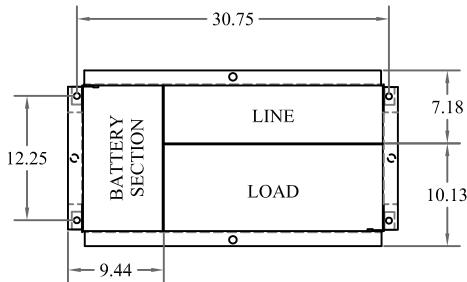

BASE DETAIL

BATTERY BACK-UP PEDESTAL

TYPICAL APPLICATIONS INCLUDE STREET LIGHTING AND TRAFFIC SIGNAL SERVICE

STANDARD FEATURES

- METER SOCKET with TEST BLOCKS 4-JAW
- LANDING LUGS 250kCMIL - 6
- STANDARD VOLTAGE 120/240VAC 1-PHASE 3-WIRE
- CIRCUIT BREAKER INTERIOR SIZED FOR JOB SPECIFICATIONS; METERED OR UN-METERED
- ACCOMODATES DIFFERENT BRANDS OF BATTERIES AND UPS DEVICES (RACK-MOUNTED ON 19" EIA RAIL)
- COOLING FANS FOR BATTERY CABINET AND UPS; with INDIVIDUAL TEMPERATURE CONTROL

SPECIFICATIONS

- * COMPLIES WITH EUSERC STANDARDS & DWG. 308
- * NEMA 3R CONSTRUCTION
- * FABRICATED FROM CORROSION-RESISTANT 0.125THK ALUMINUM
- * AVAILABLE IN STAINLESS STEEL

- * ALL FACTORY WIRING 600 VOLT RATED COPPER
- * ALL EXTERIOR DOORS AND COVERS PADLOCKABLE
- * UTILITY COVERS SEALABLE