



USPIL MODEL SERIES



0 - 200 AMPERES 0 - 600 VOLTS

MULTI-PURPOSE METER PEDESTAL

IDEAL FOR CONTROL APPLICATIONS
SUCH AS PARKS, BALL FIELD AND
COURT LIGHTING, GOLF COURSES,
MOTOR CONTROL AND IRRIGATION


STANDARD FEATURES

- BACK - TO - BACK CUSTOMER DOORS
- UTILITY PULL SECTION ON LEFT SIDE
- BONDED NEUTRAL AND EQUIPMENT GROUND
- 200 AMP MAXIMUM
- 120/240 VAC 1 PHASE 3 WIRE
- CIRCUIT AND PANEL NAMEPLATES
- REAR SECTION ACCOMMODATES
42-CIRCUIT PANELBOARD
- FRONT SECTION ACCOMMODATES
24-CIRCUIT PANELBOARD

OPTIONAL FEATURES

- STAINLESS STEEL ENCLOSURE
- VOLTAGES AVAILABLE UP TO 480VAC 3-PHASE
- SHORT CIRCUIT RATING UP TO 42,000 AIC
- UL LISTED SERIES RATED AND FULL RATED AIC CIRCUIT BREAKERS
- CLASS T PULLOUT FUSED DISCONNECT AVAILABLE
- CIRCUIT BREAKER INTERIORS AND PANELBOARDS WITH COPPER OR ALUMINUM BUS
- PHOTOELECTRIC SOCKETS
- TEST SWITCHES AND SELECTOR SWITCHES
- TIMECLOCKS
- TRANSFORMERS
- CONTACTORS, ELECTRICALLY AND MECHANICALLY HELD
- MERCURY RELAYS
- MOTOR STARTERS
- THERMOSTATS, FANS AND HEATERS
- DUPLEX AND TWISTLOCK RECEPTACLES
- PIN AND SLEEVE RECEPTACLE, 200A MAXIMUM
- EMERGENCY POWER TRANSFER SWITCHES

OTHER EQUIPMENT AND FEATURES AVAILABLE -
CONSULT YOUR FACTORY REPRESENTATIVE

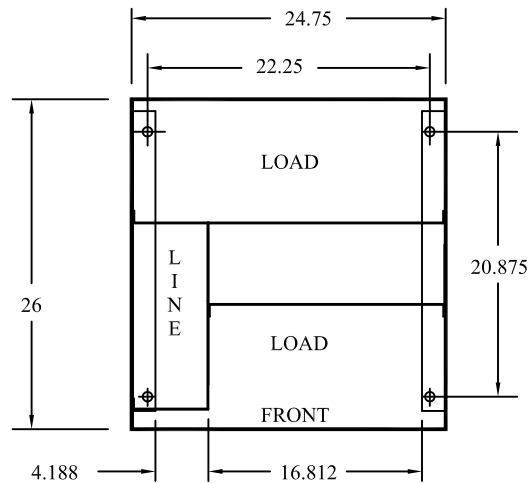

MOUNTING PLAN

SPECIFICATIONS

- * COMPLIES WITH EUSERC STANDARDS & DWG. 308
- * 12 GA. NEMA 3R CONSTRUCTION
- * POLYESTER POWDER-COATED FINISH
EXCEEDS ASTM B-117 SPECIFICATIONS
- * FABRICATED FROM CORROSION-RESISTANT
ZINC COATED STEEL
- * AVAILABLE IN STAINLESS STEEL
- * LIGHT GREEN COLOR NO. 14672 PER
FEDERAL SPECIFICATIONS 595 -
CUSTOM COLORS AVAILABLE
- * ALL FACTORY WIRING 600 VOLT RATED COPPER
- * ALL COMPONENTS UL LISTED
- * ALL EXTERIOR DOORS AND COVERS PADLOCKABLE
- * UTILITY COVERS SEALABLE