

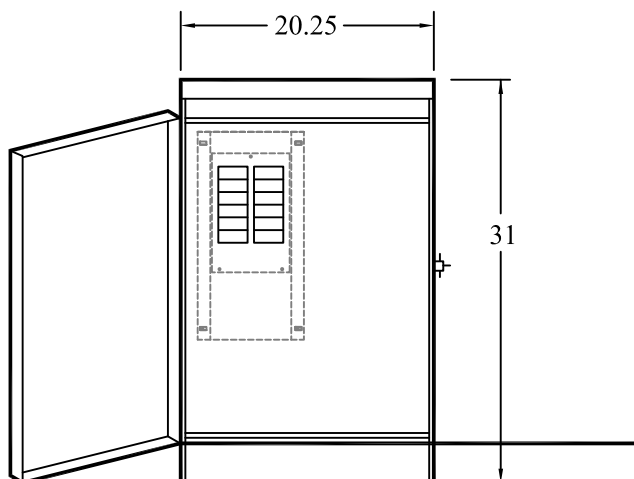


FRONT VIEW

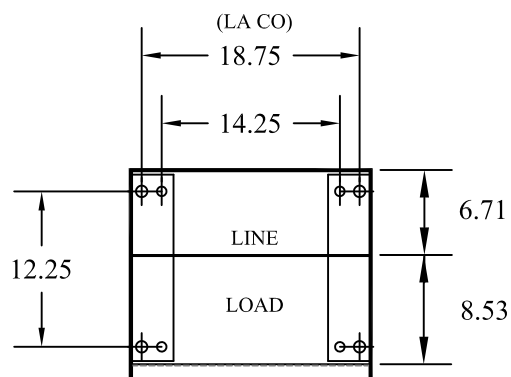

LEFT SIDE VIEW

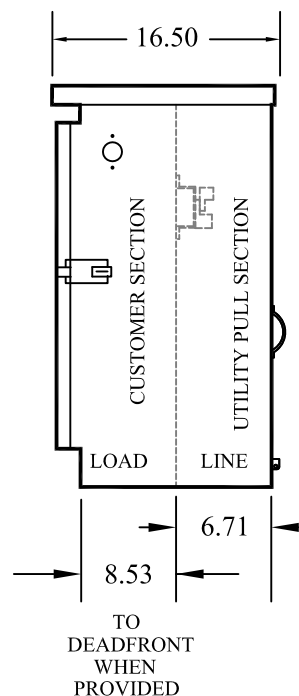

FRONT MOUNTING PLAN

UNMETERED SERVICE PEDESTAL

TYPICAL APPLICATIONS INCLUDE
 TELEPHONE INTERCONNECT CABINET
 FIBEROPTICS AND
 UNMETERED STREET LIGHTING
 IRRIGATION CONTROL ENCLOSURE

STANDARD FEATURES

UTILITY LANDING LUGS 250 KCMIL
 STANDARD VOLTAGE 120/240VAC 1 PHASE 3 WIRE
 CIRCUIT BREAKER INTERIOR PER JOB SPECIFICATIONS
 DEADFRONT CONSTRUCTION AS REQUIRED

SPECIFICATIONS

- * NEMA 3R CONSTRUCTION
- * POLYESTER POWDER-COATED FINISH EXCEEDS ASTM B-117 SPECIFICATIONS
- * FABRICATED FROM CORROSION-RESISTANT ZINC COATED STEEL
- * AVAILABLE IN ALUMINUM & STAINLESS STEEL

- * LIGHT GREEN COLOR NO. 14672 PER FEDERAL SPECIFICATIONS 595 - CUSTOM COLORS AVAILABLE
- * ALL FACTORY WIRING 600 VOLT RATED COPPER
- * ALL COMPONENTS UL LISTED
- * ALL EXTERIOR DOORS AND COVERS PADLOCKABLE
- * UTILITY COVERS SEALABLE